

Glass Door Pharmacy Refrigerators/Freezers

Our **CliniCool® Silver Series PRIME** glass door pharmacy refrigerator/freezer combinations are ideal for pharmacies with limited space, but require superior temperature performance and vaccine/sample security that meets federal and state guidelines.



LABHP-9-RFC-PH

Standard Product Features:

- Manual defrost freezer with cycle defrost refrigerator
- Microprocessor temperature control with audible and visual alarms
- Digital temperature display
- Remote alarm contacts.
- -25°C (-13°F) freezer operating temperature; +4°C (39.2°F) refrigerator operating temperature
- White powder coat paint exterior
- Pharmacy refrigerator/freezer toolkit
- Temperature logs
- CDC approved power cords
- Glass door on refrigerators; solid door on freezers
- Key lock doors; right hand swing
- Front ventilation on 9 cu. ft. model
- Heavy duty wire shelves
- Leveling legs
- 115V operation (requires two outlets)
- Probe access port (3/8")
- Warranties: 2 years parts and labor, 5 years compressor parts only

Optional Features:

- Data logger




LABHP-4-RFC-PH




LABHP-14-RFC-PH

Specifications and Ordering Information:


Top View




LABHP-4-RFC-PH




LABHP-7-RFC-PH



LABHP-9-RFC-PH



LABHP-12-RFC-PH



LABHP-14-RFC-PH

Model	LABHP-4-RFC-PH	LABHP-7-RFC-PH	LABHP-9-RFC-PH	LABHP-12-RFC-PH	LABHP-14-RFC-PH
Weight lbs	114	139	205	221	241
Overall Height in.	48 3/8	51 5/8	66 3/4	72 15/16	81 13/16
Overall Width in.	18 1/2	23 3/4	23 3/4	24 13/16	24 13/16
Overall Depth in.	19 1/2	24	25 1/2	24 1/32	24 1/32
Interior Height in.: Refriger.	23 1/4	26 3/4	24 1/2	35 1/4	44
Freezer	13 3/4	13 3/4	23 3/4	13 3/4	13 3/4
Interior Width in.: Refriger.	14 1/4	20 1/4	20 1/4	21 3/8	20 1/2
Freezer	14	14	19 1/4	14	14
Interior Depth in.: Refriger.	13 1/4	16 1/2	17 3/4	18	18 1/2
Freezer	12 1/2	12 1/2	17 1/4	12 1/2	12 1/2
Interior cu. ft. Refriger.	2.3	5.2	4.6	10	12
Freezer	1.5	1.5	4.5	1.5	1.5
# of Shelves: Refriger.	3 adj	3 adj	1 fixed; 2 adj	3 adj	3 adj
Freezer	1 fixed	1 fixed	2 fixed	1 fixed	1 fixed
Defrost Type (refrig;frz)	Cycle; Manual	Cycle; Manual	Cycle; Manual	Cycle; Manual	Cycle; Manual
Temperature: Refriger.	+2°C to +8°C +35.6°F to +46.4°F	+2°C to +8°C +35.6°F to +46.4°F	+2°C to +8°C +35.6°F to +46.4°F	+2°C to +8°C +35.6°F to +46.4°F	+2°C to +8°C +35.6°F to +46.4°F
Freezer	-15°C to -25°C +5°F to -13°F	-15°C to -25°C +5°F to -13°F	-15°C to -25°C +5°F to -13°F	-15°C to -25°C +5°F to -13°F	-15°C to -25°C +5°F to -13°F
Compressor Size HP (refrig;frz)	1/7; 1/10	1/5; 1/10	1/3; 1/3	1/5; 1/10	1/5; 1/10
Plug (Receptacle)	5-15P (5-15R)	5-15P (5-15R)	5-15P (5-15R)	5-15P (5-15R)	5-15P (5-15R)
Total Amp Draw (refrig;frz)	2; 1.1	2; 1.1	5; 5	4.1; 1.1	4.1; 1.1
Voltage	115V, 1PH, 60Hz	115V, 1PH, 60Hz	115V, 1PH, 60Hz	115V, 1PH, 60Hz	115V, 1PH, 60Hz

Specifications subject to change without notice.

All PRIME units come standard with microprocessor temperature controller, audible and visual alarms, digital temperature display and remote alarm contacts.


Front Exterior View




LABHP-4-RFC-PH




LABHP-7-RFC-PH



LABHP-9-RFC-PH



LABHP-12-RFC-PH

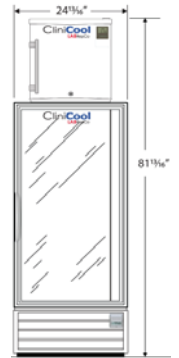

LABHP-14-RFC-PH

Receptacle Required
115V/1PH/ 60Hz
NEMA-5-15R

